DC155 Digital Visualizer

Quick Start Guide

1. Package Content

DC155 & Remote	Quick Start Guide & User Manual	Soft Bag (Big, Small)
		
Power Cord	**VGA Cable**	**USB Cable**
		
C-Video Cable	**RS232 Adapter**	**DVI Adapter (Optional)**
		

2. Product Overview

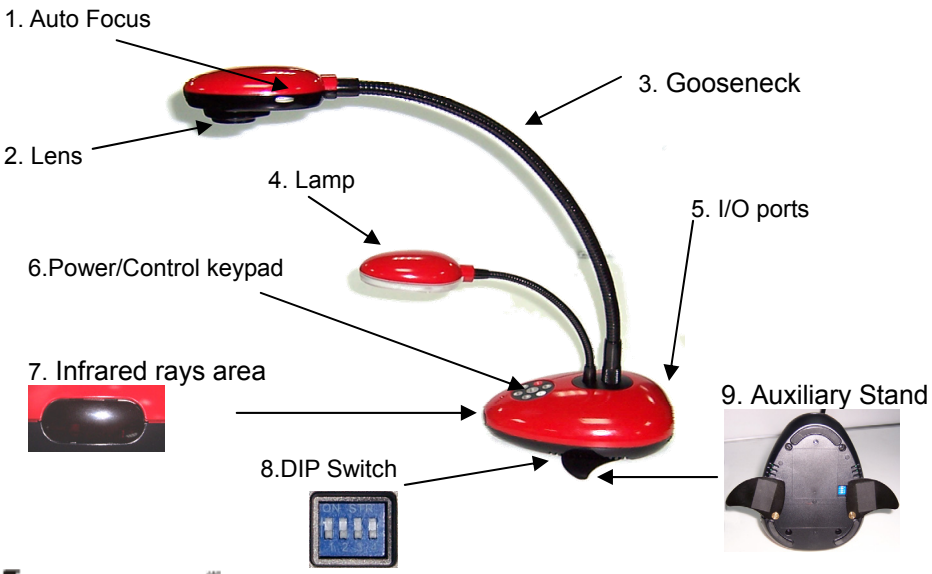

3. I/O Connection

3.1 Connecting VGA out to Monitor or Projector

VAG Out

Monitor

Projector

3.2 Connecting DVI out to Monitor or Projector

DVI Out

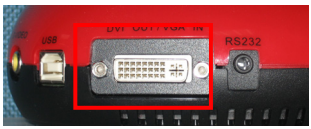

Monitor

Projector

3.3 Connecting C-Video to TV

C-Video

TV

DIP Switch (NTSC)

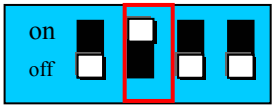

DIP Switch (PAL)



【**Notice**】NTSC Setting: USA、Taiwan、 Panama、Philippine、Canadian、Chile、Japan、Korea、Mexico

PAL: Besides above listed countries

3.4 Connecting VGA in to Computer

VGA in

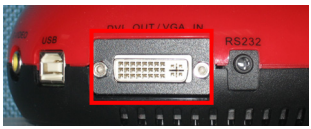

PC Notebook

【Notice】DVI to VGA adapter (optional) cable must be used.

No VGA output once C-Video output is turn on.



3.5 Connecting USB to Computer

Connect to USB port then install the supplied queue program. Please refer to Software user's manual.

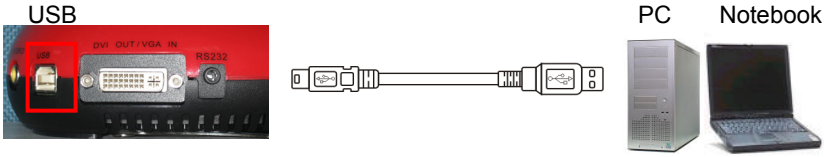

【Notice】Don't connect the Digital Visualizer to PC until USB Driver has been installed properly.

3.6 RS232 to Computer

Connect to RS232 port then execute RS232 command.

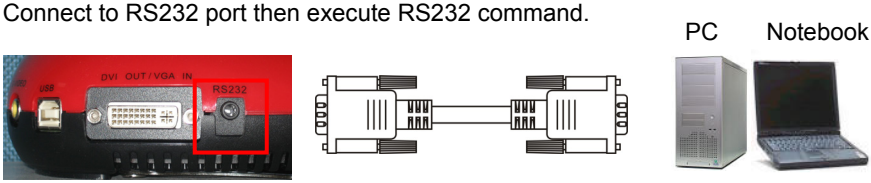

3.7 Plug in the power outlet

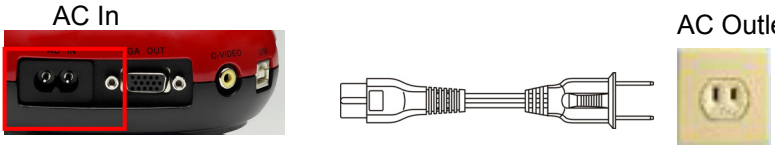

4. Start to use

4.1 Turn on the Digital Visualizer

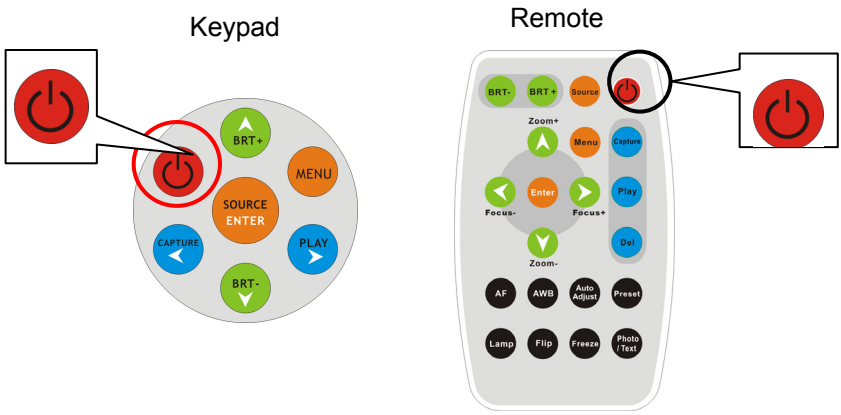

4.2 Auto-adjust the optimum image

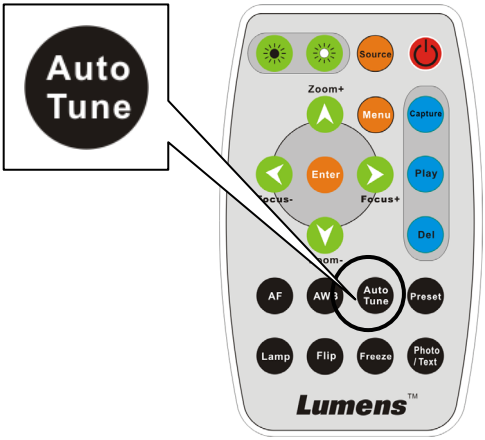

5 . Major Functions

5.1 Select Input Source

The default input source is set as "Digital Visualizer", press 『Source』 to switch.

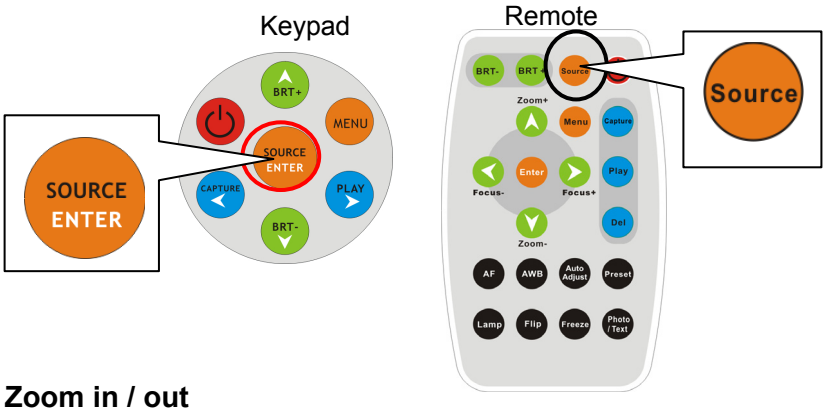

5.2 Zoom in / out

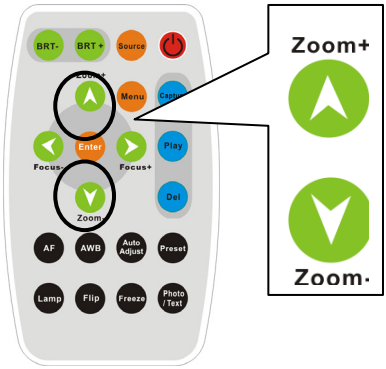

5.3 Auto Focus

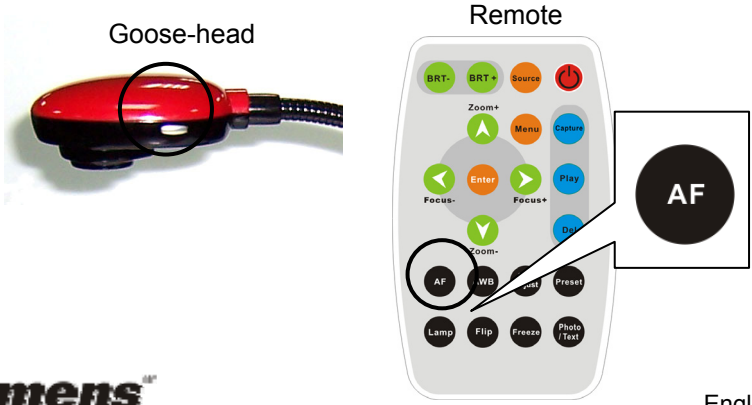

5.4 Brightness Adjustment

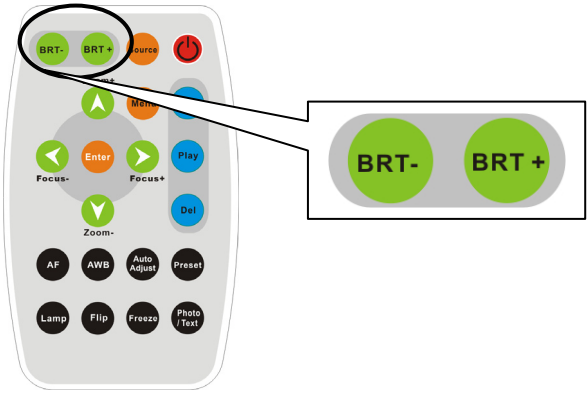

5.5 Capture & Play Image

Capture Live Image or Play the captured image

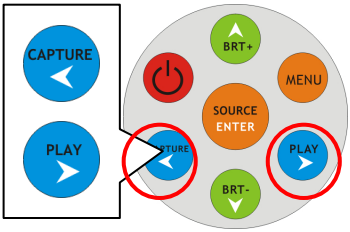

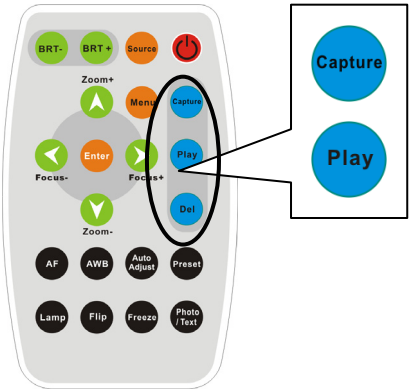

5.6 OSD Menu

Keypad

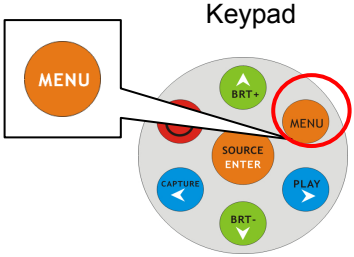

Remote

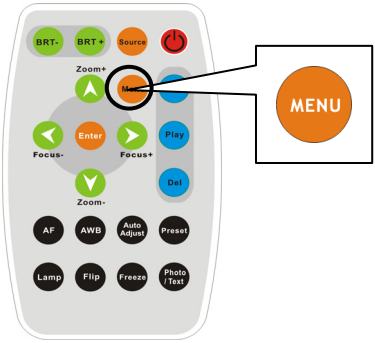

* More detail functions of full Control Menu (OSD Menu), please read the user manual..